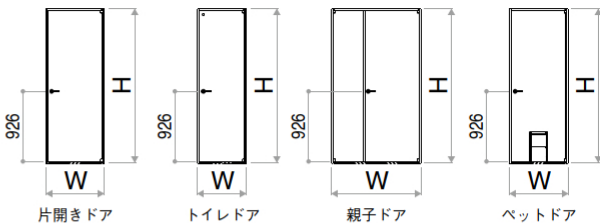


※【】内は**枠見込156**の場合の寸法です。
枠見込171・186の場合は“寸法対応表”をご参照ください。

[illegible]

基本寸法 (mm)	片開き・トイレ・ベット							親子
	W呼称	064	073	075	077	082	087	118
	W(DW)	648(591)	733(676)	752(695)	778(721)	823(766)	878(821)	1,188(721/407)
	有効開口	520	605	624	650	695	750	994
	H呼称	20						
	H(DH)	2,033(1,989)						

DW、有効開口、DH寸法算出公式

桦見込	156	171	186
壁厚 (対象)	130 (116~130)	145 (131~145)	160 (146~160)
柱寸法	105	120	105
寸法	A	84	99
	B	86.5	101.5
			116.5

片開き・トイレ・ベット	親子 DW1:親扉 DW2:子扉
DW=W-57	DW1=W-60-DW2(DW2=W-60-DW1)
DH=H-44	DH=H-44
有効開口=W-128	有効開口=W-194

Technical drawing of a cross-section of a concrete structure with a column core (柱芯). The drawing shows a concrete wall with a central column core. Dimensions are given in millimeters. Key dimensions include: total width 156mm (柱見込 [156]), total height 305mm, core diameter 29.5mm (① 29.5), core offset 48.5mm (② 48.5), wall thickness 75.5mm, and various offsets and clearances like 10.5, 2.5, 3.5, and 12. A note "破線部カット" (cut section) is present.

[illegible]

床施工	沓摺タイプ	取付位置	①	②
床後貼	薄沓摺(シート)	桢見込156	75.5	—
		桢見込171	83	—
		桢見込186	90.5	—
	段沓摺(シート)	桢見込156	29.5	48.5
		桢見込171	22	63.5
		桢見込186	14.5	78.5
床先貼	埋込沓摺(アルミ)	桢見込156	43	—
		桢見込171	50.5	—
		桢見込186	58	—